

GPS

STANDARD

Committed to security.

PERIMETER



SECURITY SYSTEM **SUN**





S U N

PERIMETER

SUN

protection for SOLAR and PHOTOVOLTAIC PANELS

Solar and photovoltaic panel are becoming more and more widespread and there is often a requirement to protect them.

SUN™ is a fibre optic system that gives protection against removal of the panels.

The system protects the panels by joining them together using a fibre optic cable. Removal of a panel causes an interruption in the fibre

optic and consequently generates an alarm.

Our many years experience in the field has produced this specific system concept for the security of solar panels and photovoltaic systems, because we understand very well that it is important to avoid shadows and to reduce the performance of the panels, while at the same time not adversely affecting the aesthetics of the site

Simplicity

Protection is effected with a glass multimode optical fibre that can be quickly fixed to the photovoltaic panel once the sensitive eyelets have been created without having to use the "classic" "enter and exit" method.

Flexibility

The fibre optic has a small diameter, is easy to install and after installation, is virtually invisible.

Savings

SUN™ is a simple and economic system that allows the creation of fibre rings of 1000m to protect hundreds of panels together using a single cable.

Resistance

The fibre optic does not deteriorate, rust and is therefore hard wearing over time.

Protection

The fibre optic security system is excellent because of the reliability of the optical signal. In addition,

SUN™ cannot be intercepted and is therefore not removable.

OPERATION

The SUN processing unit generates and analyses a light which is sent down an optical fibre for all the protection zones.

The light is modulated so as not to swamp the receiver, located at the extreme end of the optical fibre, using another luminous source.


The SUN™ unit analyses the light received in real time and if this is insufficient, due to interference with the optical fibre, will generate

an alarm.

Alarm signalling is via a relay contact on the processing board. Each SUN™ can monitor up to 1000m of multimode fibre. On the 1000-metre stretch of optical fibre it is possible to create up to 600 sensitive eyelets for a maximum protection of 600 photovoltaic panels.



SUN™ protects solar panel installations using a single fibre optic cable. Each processor unit monitors up to 1000 metres detecting a breakage in the fibre optic caused by removal of the solar panels.

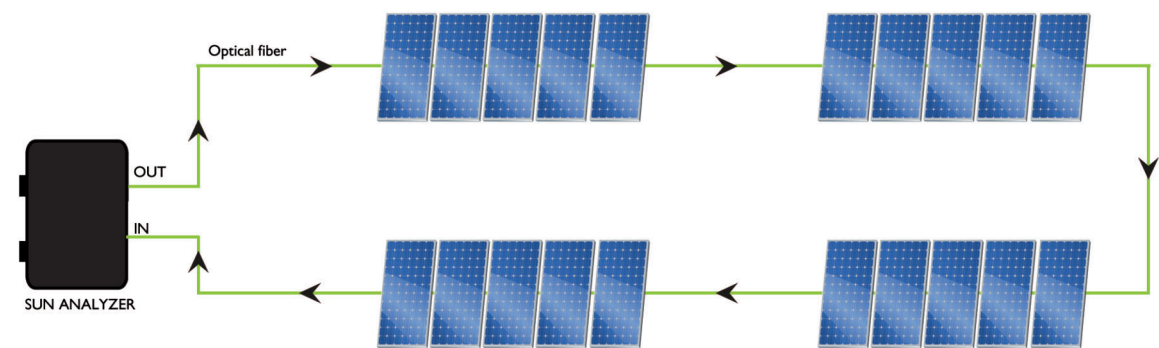

TECHNICAL SPECIFICATIONS

Coverage per unit	1000 metres
Max number of eyelets	600
Power Supply	10,5 ÷ 16 Vcc (12 Volt nominal)
Current	max 50mA @ 12 Vcc
Relay output	1 (C, NC, NA)
Optic fibre	62.5/125 multimode single fibre optic cable diameter 3mm Max attenuation ≤ 3,5db/km
Contact rating	100mA @12Vcc
Wavelength	820 nm
Optical connectors	ST
Technology	SMD
Operating temperature	-30° ÷ +70°C
Cabinet	Metallic box
Cabinet Dimensions (WxHxD)	87x45x72 mm

Retailer of confidence



GPS

STANDARD

Committed to security.

GPS STANDARD SRL

Fraz. Arnad Le Vieux, 45/C • I1020 Arnad (AO) - Italy • Ph. +39 0125 96 86 11 • Fax +39 0125 96 60 43
info@gps-standard.com • www.gps-standard.com



COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
ISO 9001

COMPANY WITH
ENVIRONMENTAL SYSTEM
CERTIFIED BY DNV
ISO 14001

COMPANY WITH
SAFETY SYSTEM
CERTIFIED BY DNV
ISO 45001



Copyright by GPS Standard Srl

The rights of translation, reproduction or complete or partial amendment, by any means, are reserved in all countries.

GPS Standard reserves the right to modify the technical characteristics and prices without prior notice.

The information provided in this document is subject to modification and/or errors.

For detailed information refer to GPS Standard.